

# DECK HARDWARE



**1. Rafter Tie**  
RT15-TZ



**2. Post Cap**  
PB44-6TZ / C44-TZ



**3. Rafter Tie**  
RT7A-TZ



**4. Joist Hanger**  
JUS-TZ Series



**5. Adjustable Deck Tension Tie**  
ADTT-TZ



**6. Inverted Flange Joist Hanger**  
JLIF-TZ




**7. Deck Tie Back**  
DTB-TZ



**8. Concealed Stringer Hanger**  
CSH-TZ



**9. Stair Angle**  
SCA9-TZ




**10. Post Anchor**  
PA-TZ / PAU-TZ

Disclaimer: Some of the products displayed are optional and not estimated


**DECK HARDWARE INSTALLATION**



**Typical CSH-TZ installation**




**Typical RT15-TZ installation**




**Typical PA-TZ installation**




**Typical ADTT-TZ installation**




**Typical SCA9-TZ installation**




**Typical C44-TZ installation**



**Typical PB44-6TZ installation**



**Typical RT7A-TZ installation**

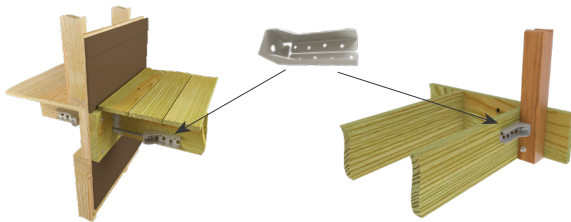

**Typical DTB-TZ installations**

The type and quantity of fasteners used to install MiTek products is critical to connector performance. MiTek has a full range of structurally-rated fasteners for wood frame structures. Hot-Dip Galvanized, Stainless Steel, EXT-Exterior Coating and Gold Coat corrosion resistant finishes are available for exterior applications.

MiTek Deck Hardware is available in Triple Zinc (TZ) and Gold Coat (GC).



**TZ galvanizing** provides a prefabrication coating of 1.85 (G-185) ounces of zinc per square foot of surface area (both sides) measured in accordance with ASTM A 653. Use with Hot-Dip Galvanized fasteners.



**Gold Coat** is a proprietary multi-layer protection system. It is comprised of an organic top coat barrier layer and a zinc layer placed over a steel substrate. Use with Gold Coat or Hot-Dip Galvanized fasteners.