


WIZARD PDS® TABLES

An automated jiggging system designed to increase efficiency and reduce costs.

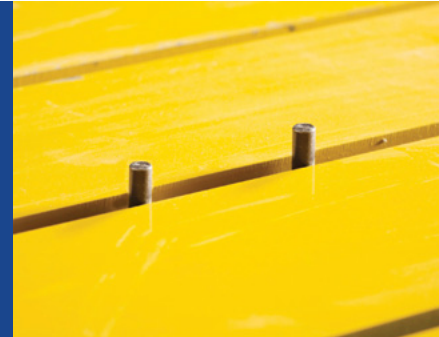

PHYSICAL DATA

Components	Drop-in channels with motor and two pins per channel
Channel width	7"
On-center spacing	24" (approximate)
Pin diameter	3/4"
Motor	Two 1/4 hp motors per gearbox drive assembly

PERFORMANCE DATA

Pin setup time	About 15 seconds
HMI	PC with Wizard PDS® Gold software

FEATURES

- Dramatically reduces setup time compared to manual jiggging.
- Integrates with existing truss design software.
- Installs in new MatchPoint PDS™ tables from MiTek or existing tables from a variety of manufacturers.
- Integrates with existing laser projection systems.
- Uses dust- and water-resistant cabling and electrical enclosures.

ELECTRICAL DATA

Electrical specs or motors

208 VAC

3-phase

60 Hz

Electrical specs for control box

120 VAC, 20a per control box (one control box per every four channels)

SAFETY DATA

Safety compliance

UL (panels), OSHA

OPTIONS

- Laser integration to integrate Wizard PDS® Gold Software with any laser system
- Truss assembly information displayed on television or projector screen